


- Full-automatic test fixture with parallel vertical closing
- From small to large production capacity
- For operators, robots or cobots
- Guaranteed -80dB RF insulation from 100 MHz to 6 GHz

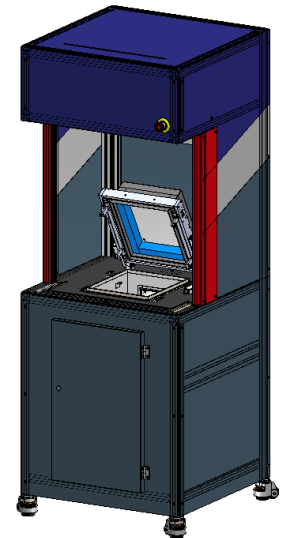

General Data

Standard version:	Yes
Useable area:	250 x 300 mm
Antistatic-compliant:	Yes
ESD-compliant:	Yes, option on demand
Max. contact force:	700 N
Bottom contacting:	Yes, standard
Top contacting:	Yes, option on demand
Radio frequency version:	Yes
Weight:	70 kg
Outer dimensions open (WxDxH):	703 x 790 x 1870 mm
Outer dimensions closed (WxDxH):	703 x 790 x 1870 mm

Technical Specification

Product group:	Test Fixture
Serie:	Upe
Sub-serie:	SFA
Standard size reference:	2
Fixture's type:	Pressor
Parallel contacting stroke:	15 mm
Min. Temperature:	+10°C
Max. Temperature:	+60°C
Standard Version:	Yes
Opening angle:	60°
Max. production capacity:	300,000 pcs / month