


- Semi-automatic test fixture with parallel vertical closing
- From small to large production capacity
- Customization included or not, ESD or not (on demand)
- Guaranteed -80dB RF insulation from 100 MHz to 6 GHz

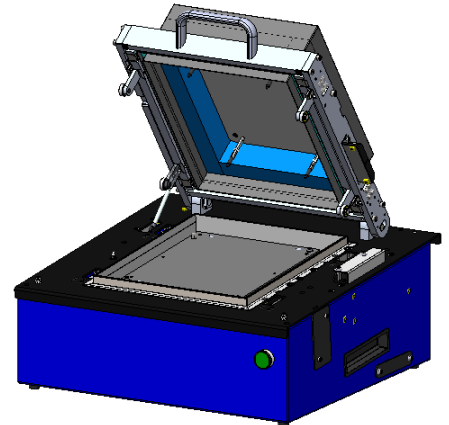

## General Data

Standard version:	Yes
Useable area:	250 x 300 mm
Antistatic-compliant:	Yes
ESD-compliant:	Yes, option on demand
Max. contact force:	400 N
Bottom contacting:	Yes, standard
Top contacting:	Yes, standard
Radio frequency version:	Yes
RF Insulation:	-80 dB
Weight:	22,7 kg
Outer dimensions open (WxDxH):	488 x 482 x 540 mm
Outer dimensions closed (WxDxH):	488 x 482 x 335 mm

## Technical Specification

Product group:	Test Fixture
Serie:	Upe
Sub-serie:	SHA
Standard size reference:	02
Fixture's type:	Pressor
Parallel contacting stroke:	15 mm
Min. Temperature:	+10°C
Max. Temperature:	+60°C
Standard Version:	Yes
Opening angle:	60°
Max. production capacity:	100,000 pcs / month